


Products Features

- ▶ Using special diffuser.
- ▶ Dome structure.
- ▶ Suitable for the application of uneven or reflective surface.

Model Description

SBS-DL-XXXXX-X

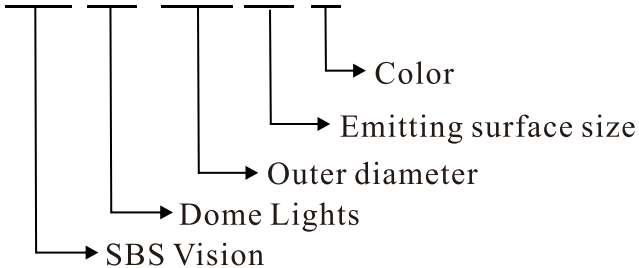


Applications the light be used for

- Uneven and reflective surface defects inspection.
- Characters inspection of IC surface.
- Damage inspection of condenser.
- QR code inspection of can.
- Glass instrument panel inspection.
- IC defects inspection of PCB board.


Customization

- Dimensions
- Power
- Color
- Cable length
- Connector
- Mounting

Structure

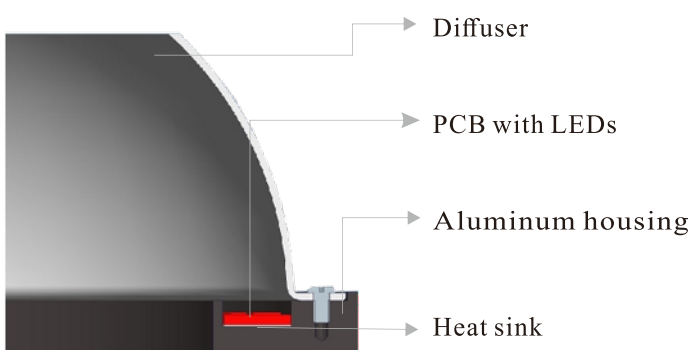

Components

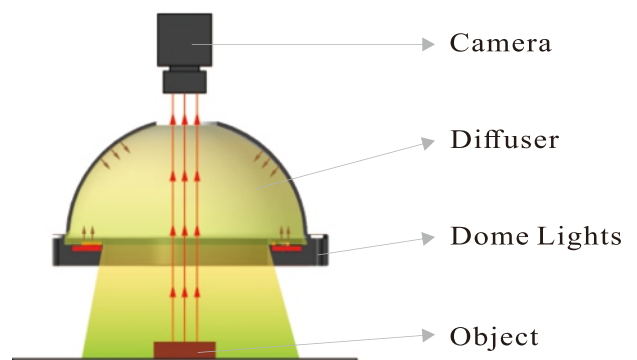

Parameter

Item	Model	Power consumption Red Color	Power consumption (W,B,G)	Option	Extension cable	Recommended Controller
1	SBS-DL7043	24V/1.8W	24V/2.6W	Diffuser	1m/3m/5m	SBS-AC24-2B (Analog controller) SBS-DC24-2B (Digital controller) SBS-SC24-B (Strobe controller)
2	SBS-DL11666	24V/7.0W	24V/9.7W	Diffuser	1m/3m/5m	
3	SBS-DL175116	24V/9.0W	24V/12.0W	Diffuser	1m/3m/5m	
4	SBS-DL198138	24V/12.0W	24V/15.0W	Diffuser	1m/3m/5m	
5	SBS-DL260193	24V/14.0W	24V/17.0W	Diffuser	1m/3m/5m	
6	SBS-DL325265	24V/29.0W	24V/36.0W	Diffuser	1m/3m/5m	

Dimensions(mm)

<p>SBS-DL7043</p>	<p>SBS-DL11666</p>
<p>SBS-DL175116</p>	<p>SBS-DL198138</p>
<p>SBS-DL260193</p>	<p>SBS-DL325265</p>